

K948

Durability and composure for a Better Healthcare Environment

Patient Bedside Terminal K948 series offers a cutting edge LCD touch screen terminal for all. The terminal offers everything - hospital information access, entertainment and internet connection. Its simplicity and neat design provide the most clear and comfort vision in optimum size with the advanced material in anti-bacterial technology.



- Experienced Medical Device designer / manufacture. (ISO 13485 / UL ANSI / AAMI ES60601-1)
- Professional Design and Manufacture.
- Modular Design provides cost effectiveness and flexibility.



Features



Feather Light Weight



Default Device
(5M AF Camera / Light Sensor / LED Reading Light / Smart IC Card Reader / VOIP Phone)




Tranquil & Soundless Operation



Peripheral Option Device
(Combo Card Reader / 2D Scanner)

MED Healthcare Series

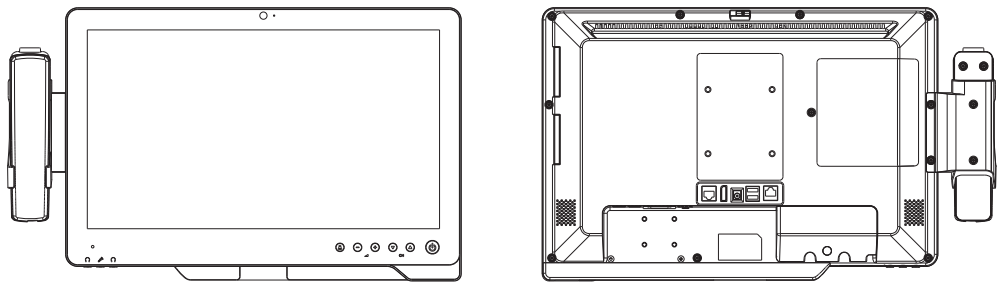

Specifications

Model Name	K948
Mainboard	C73
Processor	Intel Celeron 1047UE 2M Cache 1.4GHz
Chipset	HM76
System Memory	1 x DDR3 SO-DIMM slot up to 4GB FSB 1600MHz
Graphic Memory	HD Graphics 350MHz DX11
LCD Touch Panel	
LCD Size	18.5" TFT LCD
Brightness	250 cd/m ²
Resolution	1366x768
Touch Screen	Zero Bezel Projective Capacitive
Storage Device	
Hard Drive	1 x 2.5" Slim SATA HDD or SSD
Expansion	
Mini PCI-E Slot	1 x Full size slot & 1 x Half size slot
External I/O Ports	
Line-out	2
Mic-in	1
USB 2.0	5
USB 3.0	3
LAN (10/100/1000)	2 x RJ45
Remote Control	1 x SCSI 26pin
Power Button	1
Reset Button	1
Display Port	1 for DVI-D
Nurse Call	1 x RJ48
Default Device	
Webcam	5M Pixel AF Camera w/ Power LED & Camera Latch
Light Sensor	1
LED Reading Light	2 LED cells
Smart IC Card Reader	1
VOIP Phone	1 x Handset & Cradle
Speaker	2 x 3W Built-in
Peripheral Option Device	
Combo Card Reader	RFID & 2 nd Smart IC Card Reader
Scanner	1 x 2D Optical Scanner
Certificate	
EMC & Safety	FCC / CE / UL ANSI / AAMI ES60601-1
Environment	
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Operating Humidity	20% ~ 85% RH non-condensing
Dimensions (W x D x H)	462 x 55 x 319 mm (18.2" x 2.2" x 12.6") (Without handset)
Weight	4.5kgs (10lbs) w/o Handset
OS Supported	Windows Embedded POSReady7, Windows 7, Windows 8, Linux

Product specifications are subject to change without prior notice.

©2013 Flytech Technology Co., Ltd. Registered trademarks and trademarks are property of their respective owners. The specification is subject to change without prior notice. Flytech endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omissions. The development of Flytech products and services is continuous, and published information may not be up to date. It is important to check the current position with Flytech.

1310 - K948a

FLYTECH

FLYTECH TECHNOLOGY CO., LTD.

No. 168, Sing-ai Rd., Neihu District,
Taipei City 11494, Taiwan, R.O.C.
Tel: 886-2-8791-4988
Fax: 886-2-8791-4966
E-mail: sales@flytech.com.tw
www.flytech.com

U.S.A. - California

728 Charcot Ave, San Jose, CA 95131, U.S.A Tel: 1-510-257-5180 Fax: 1-510-257-5181 E-mail: sales@flytech.com

China - Shanghai

3F Building 39, No.333 Qin Jiang Rd., Shanghai 200233, P.R.China
Tel: 86-21-5426-1555 Fax: 86-21-5426-1001 http://www.flytech.com.cn E-mail: sales@flytech.com.cn

China - Hong Kong

Room 01, 6/F, Block A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong.
Tel: 852-3525-5800 Fax: 852-2751-7447 E-mail: sales@flytech.com.hk